


Declaration Of Performance

WaterCare Oil Separator w/bypass 20/200 l/sec - 223373120

No.: DoP_EN_223373120_EN858

Valid from: 2024.01.24

Identification	
1. Product	WaterCare Oil Separator w/bypass 20/200 l/sec
2. Item number	223373120 (Following approval for 223372120)
3. Intended use	Separate oil from wastewater
4. Manufacturer	WaterCare ApS Stejlebjergvej 14 DK- 5610 Assens Denmark Tel: +45 70 25 65 37 Web: www.watercare.dk
5. Authorized representative	-
6. System of assessment and verification / Notified body	System 4 / Danish Technological Institute
7. Harmonized standard / Notified body number	DS/EN 858-1 Body no. 150442-3/2022

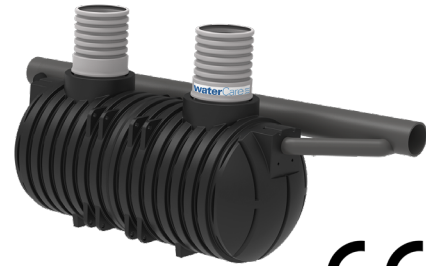

Item number: 223373120

9. Declared performance		
Essential characteristics	Performance	Harmonized technical specification
Dimensions	Length: 6000 mm. Width: 2050 mm. Height: 2722 mm (incl. inspection pipe).	-
Weight	< 600 kg	-
Quality	Class I w/bypass	DS/EN 858-1 pkt. 6.3.6 jf. 8.3.3
Nominal size	NS20	DS/EN 858-1 pkt. 6.3.6 jf. 8.3.3
Nominal capacity	6,025 m ³	DS/EN 858-1 pkt. 6.5.6
Max. oil storage capacity	2,95 m ³ (100%)*	DS/EN 858-1 pkt. 6.5.2
Integrated sludge trap capacity	2,7 m ³	-
Water tightness	Passed	DS/EN 858-1 pkt. 6.3.2
Effectiveness	Passed	DS/EN 858-1 pkt. 6.3.1, 6.3.3-6.3.8, 6.5
Load bearing capacity	Passed	DS/EN 858-1 pkt. 6.4
Max. installation depth	1,8 m (see installation instructions).	-
Hydraulic efficiency	3,96 mg/l oil	DS/EN 858-1 pkt. 4
Durability	Passed	DS/EN 858-1 pkt. 6.2
Material	PE	-
Reaction to fire	NPD	-

Signed for and on behalf of the manufacturer by:

Assens, date 24.01.2024


Jonas Groth, Engineer