




MODEL NUMBER:

- **7038.801 Tropic Widespread**
 Metal Speed Connect® pop-up drain.
 Metal lever handles.

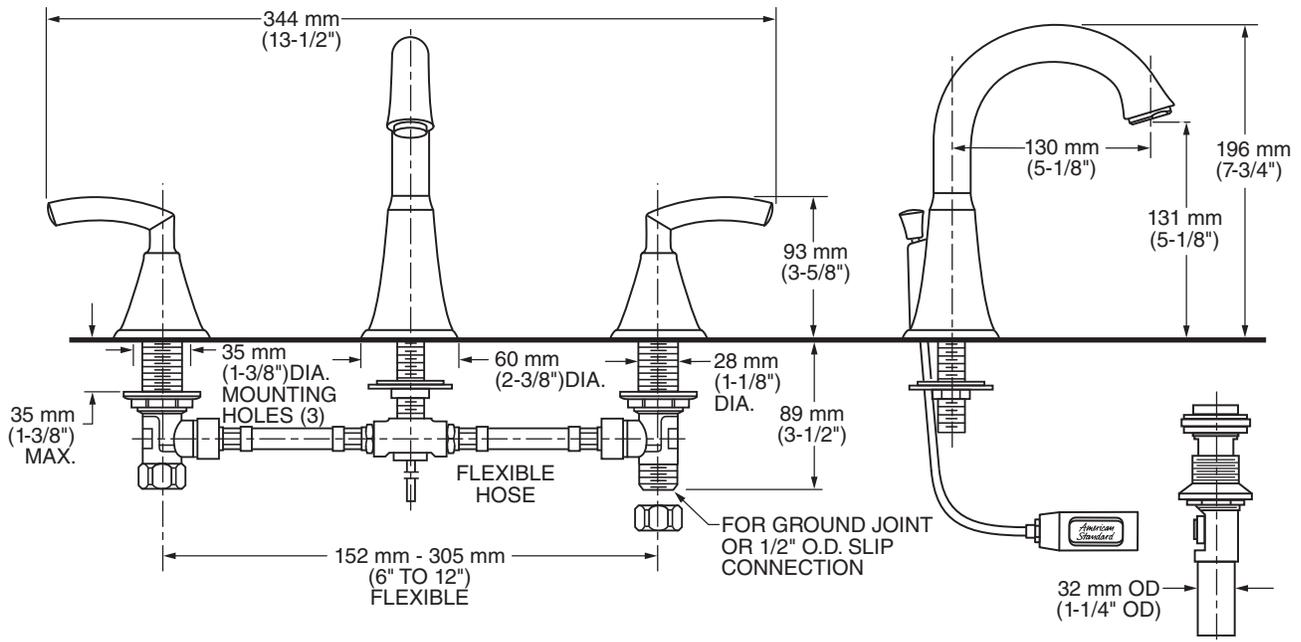

GENERAL DESCRIPTION:

Durable cast brass spout and metal lever handles. Cast brass valve bodies with flexible hose connections for 6" to 12" (152 mm to 305 mm) installations. One-half inch male inlet shanks with brass coupling nuts. 1/4 turn washerless ceramic disc valve cartridges. 20 inch (500 mm) long flexible stainless steel drain cable is pre-assembled to spout. Metal Speed Connect® drain body with 1-1/4" (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate.

PRODUCT FEATURES:

Brass Construction: Durable. Easy to clean. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Exclusive Speed Connect Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required - seals the first time, every time.
- Flexible stainless steel cable - installs effortlessly in tight spaces.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION

Two handle widespread lavatory faucet shall feature a cast brass spout and valve bodies with flexible hose connections for 6" to 12" installations. Shall feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 7038.801._____.




TROPIC®
TWO-HANDLE WIDESPREAD LAVATORY FAUCET
WITH BRASS SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B125.1**
- NSF 61/Section 9 and Annex G**

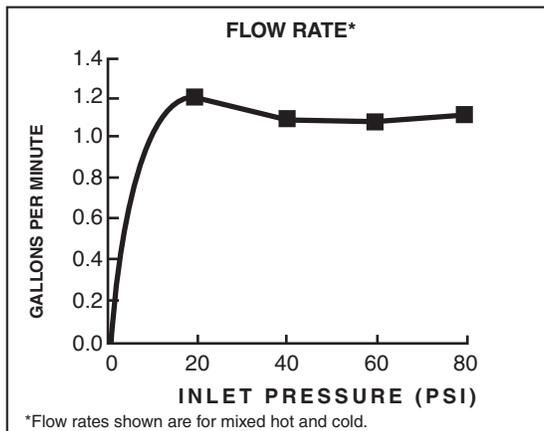

Product Number	Description	Finish Options	
		Polished Chrome	PVD Satin Nickel
		002	295
7038.801	Tropic Widespread with metal Speed Connect® pop-up drain. Metal lever handles.		

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

AERATOR MODIFICATIONS***	Parts Suffix**
0.5 gpm (1.9 Lpm) PCA* Spray	___F05
1.0 gpm (3.8 Lpm) PCA Aerator	___F10

AVAILABLE MODIFICATIONS***	Parts Suffix**
Less Pop-Up Drain Less Hole	___LDH

*PCA — Pressure Compensating

To modify a product, add suffix after the 4th digit (ex. 2064F05**101.002)

***Modified product models are **NOT** WaterSense certified.