


08SVA(S)NL SERIES NO LEAD CHROME PLATED SUPPLY (STOP) VALVE - 1/4 TURN

SPECIFICATION:

- Threads conform to ANSI/ASME B1.20.1
- Sweat connections conform to ANSI B16.18
- Cold Expansion PEX connections conform to ASTM F1960
- PEX connections conform to ASTM F1807
- Push Fit connections conform to ASSE 1061
- Compression connections conform to SAE J512
- CPVC connections conform to ASTM D2846
- Max Pressure Rating: 125 PSI
- Max Temperature Rating: 180°F (82°C)
- Chrome Plated body
- Double EPDM O-Ring Stem Packing
- PTFE Seats
- Chrome Plated ABS Handle

CERTIFICATION:

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified



08SVA-xxCEPNL



08SVS-xxCEPNL



08SVA-xxFNL



08SVA-xxPNL




08SVA-xxCNL



08SVA-xxVNL



08SVA-xxCPNL



08SVS-xxFNL



08SVS-xxPNL



08SVS-xxCPNL



08SVS-xxRFNL

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com

© 2020 Boshart Industries Inc. All Rights Reserved.


BII-08SV(A)(S)NL-0720(2067)

08SVA(S)NL SERIES

NO LEAD CHROME PLATED

SUPPLY (STOP) VALVE - 1/4 TURN

MATERIAL LIST	
Name	Material
Body	No Lead Brass
Seat	PTFE
Ball	No Lead Brass
O-Ring	EPDM
Stem	No Lead Brass
Handle	Chrome Plated ABS
Lock Nut	Stainless Steel 304
Bonnet	No Lead Brass
Compression Ring	No Lead Brass
Nut	No Lead Brass

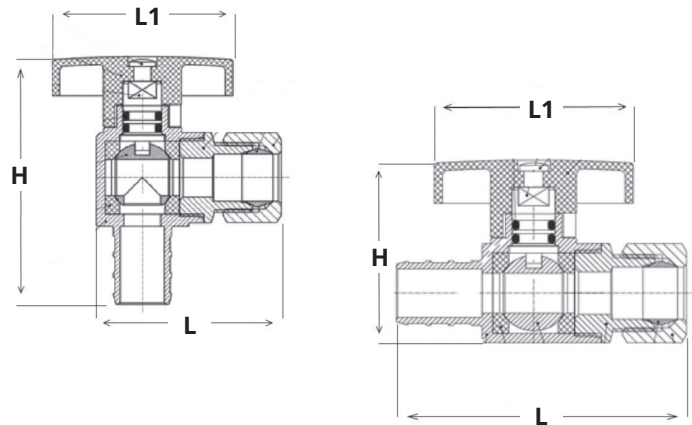

DIMENSIONS									
Part No.	Inlet Connection	Outlet Connection	L1		H		L		Weight
			inches	mm	inches	mm	inches	mm	grams
Angle Design									
08SVA-03FNL	3/8" FPT	3/8" COMP	1.67	42.50	1.78	45.30	1.76	44.60	70
08SVA-05FNL	1/2" FPT	3/8" COMP	1.67	42.50	1.93	49.00	1.76	44.60	81
08SVA-05F02CPNL	1/2" FPT	1/4" COMP	1.67	42.50	1.93	49.00	1.64	41.60	77
08SVA-05CNL	1/2" Sweat (CxC)	3/8" COMP	1.67	42.50	1.89	48.00	1.76	44.60	70
08SVA-05C02CPNL	1/2" Sweat (CxC)	1/4" COMP	1.67	42.50	1.89	48.00	1.64	41.60	68
08SVA-05CEPNL	1/2" Cold Expansion PEX	3/8" COMP	1.67	42.50	2.17	55.00	1.77	45.00	84
08SVA-05PNL	1/2"PEX	3/8" COMP	1.67	42.50	2.02	51.30	1.76	44.60	68
08SVA-05P02CPNL	1/2"PEX	1/4" COMP	1.67	42.50	2.02	51.30	1.64	41.60	63
08SVA-05VNL	1/2"CPVC	3/8" COMP	1.67	42.50	2.78	70.50	1.76	44.60	108
08SVA-58CPNL	5/8"COMP	3/8" COMP	1.67	42.50	2.13	54.00	1.76	44.60	93
08SVA-58CP02CPNL	5/8"COMP	1/4" COMP	1.67	42.50	2.13	54.00	1.64	41.60	90
Straight Deisgn									
08SVS-03FNL	3/8" FPT	3/8" COMP	1.67	42.50	1.38	35.00	2.08	52.70	68
08SVS-05FNL	1/2" FPT	3/8" COMP	1.67	42.50	1.38	35.00	2.29	58.00	84
08SVS-05CNL	1/2" Sweat (CxC)	3/8" COMP	1.67	42.50	1.38	35.00	2.16	54.70	66
08SVS-05CEPNL	1/2" Cold Expansion PEX	3/8" COMP	1.67	42.50	1.42	36.00	2.46	62.40	80
08SVS-05PNL	1/2" PEX	3/8" COMP	1.67	42.50	1.38	35.00	2.29	58.20	65
08SVS-05P05PNL	1/2" PEX	1/2" PEX	1.67	42.50	1.38	35.00	2.21	56.20	57
08SVS-05VNL	1/2"CPVC	3/8" COMP	1.67	42.50	1.38	35.00	3.13	79.50	106
08SVS-58CPNL	5/8" COMP	3/8" COMP	1.67	42.50	1.38	35.00	2.36	60.00	90
08SVS-RFNL	3/8"SWIVEL COMP	3/8" COMP	1.67	42.50	1.38	35.00	2.44	62.00	93

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com

© 2020 Boshart Industries Inc. All Rights Reserved.

BII-08SV(A)(S)NL-0720(2067)