

SUBMITTAL SHEET

811-BH Large Diameter Series

APOLLOXPRESS® Press End Copper Reducing Tee
Reducing Run CxCxC (1½" through 2½")



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	

APOLLOXPRESS
YOUR SINGLE SOURCE SOLUTION FOR PRESS TECHNOLOGY



DESCRIPTION

The APOLLOXPRESS® 811BH Large Diameter Press Reducing Run Tee features a Lead-Free dezincification resistant copper body, a patented stainless-steel solid cross-section Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. Our Large Diameter APOLLOXPRESS® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- Lead-Free Construction
- Leak-Before-Press Technology
- Visual element, Break Away Band (Pat. Pending)
- Compatible with XL-C™ & Pro-Press™ Pressing Tools
- Approved for underground installation (per local installation code)
- Use with hard/soft ASTM B88 K, L & M Copper Tube
- Made in USA
- cUPC® Compliant
- ARRA Compliant

PERFORMANCE RATING

- Maximum Pressure: 200 psi
- Temperature Range: 0°F to 250°F depending on application. Hot Water up to 250°F, Chilled Water down to 33°F

APPROVALS

- NSF/ANSI NSF 61 – Water Quality
- NSF/ANSI NSF-372 – Lead Free (LF)
- IAPMO File Listings: 4861, 6174 & N-4951

APOLLOXPRESS

- Large Diameter Sizes 1½" x 1½" x 3" through 2½" x 2½" x 4"
- Model 811-BH, Reducing Run Tee CxCxC

STANDARD MATERIALS

Part Name	Material
Body	UNS C12200 Copper
Grab Ring	304 / 306 Stainless Steel
Spacer Ring	Nylon 66
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Description	Dimension (in.)											(lb.)
		A	B	C*	D**	E*	F**	G*	H**	Height	Width	Depth	
10066550	811 1½"x1½"x3 CxCxC	13.15	6.18	1.31	5.27	1.31	5.27	2.10	2.24	6.18	13.15	3.68	6.14
10066551	811 2"x2"x3 CxCxC	12.89	6.18	1.51	4.94	1.51	4.94	2.10	2.24	6.18	12.89	3.68	6.84
10066135	811 2½"x2½"x3 CxCxC	13.92	6.18	1.90	5.06	1.90	5.06	2.10	2.24	6.18	13.92	3.68	6.76
10066094	811 2½"x2½"x4 CxCxC	16.98	7.66	1.90	6.79	1.90	6.79	2.50	2.81	7.66	16.98	4.70	12.02


* Tolerance +/- .02"

**Tolerance +.15 / -.03

Elkhart Products Corporation

1255 Oak Street, Elkhart, IN 46514

www.elkhartproducts.com | (574) 264-3181

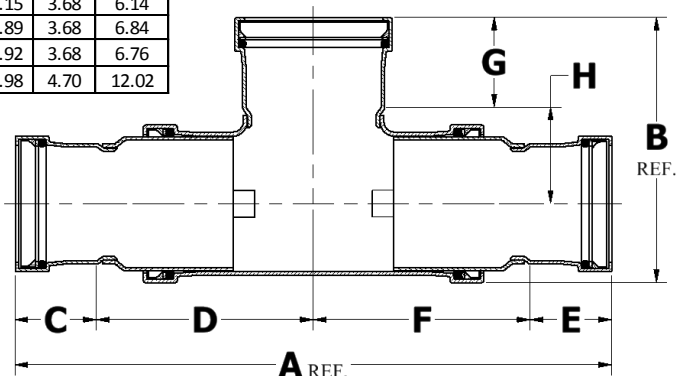

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Elkhart products previously or subsequently sold.