

131 Regalcrest Court Woodbridge, ON L4L 8P3 Tel: (905) 856-7550 Fax: (905) 856-4367 Toll free: 1-800-263-2353

TECHNICAL SPECIFICATION

Royal PVC Duct Fittings Push Fit Couplings-Straight

SCOPE

This specification covers the requirements for Polyethylene Straight Push Fit Couplings. Available sizes are shown below and are manufactured to meet CSA C22.2 No. 211.1.

MATERIALS

The couplings are manufactured from translucent polyethylene material.

MARKING


Markings on the couplings are as specified in CSA C22.2 No. 211.1.

TEST REQUIREMENTS

Quality testing is as per Royal's Quality Control program and in accordance with CSA C22.2 No. 211.1.

FITTING DIMENSIONS

Nominal Size (in)	Part Number	L, Minimum (mm)	F, Minimum (mm)	A (mm)	B (mm)
2"	PFC 02	53.5	25.4	57.38 – 57.68	56.87 – 57.17
3"	PFC 03	78.5	38.1	82.88 - 83.28	82.22 - 82.62
3 ½"	PFC 35	78.5	38.1	95.15 – 95.61	94.28 – 94.74
4"	PFC 04	78.5	38.1	107.34 – 107.80	106.68 - 107.14
5"	PFC 05	130.0	63.5	135.13 – 135.63	134.22 – 134.72
6"	PFC 06	155.5	76.2	159.87 – 160.43	158.98 – 159.54

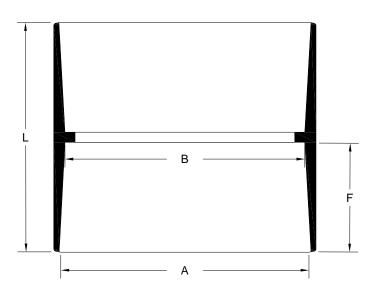

Prepared By: S. Scott Date: June 6, 2008 Revised: N/A

T:\Short Form Specifications\New Folder\Push Fit Couplings-Straight.doc