



Date:

Watts	78W
Color Temp	5100K (Cool)
Color Accuracy	71 CRI
L70 Lifespan	100,000 Hours
Lumens	8,963 lm
Efficacy	111.5 lm/W

## Page 1 of 3

## Technical Specifications (continued)

### Other

#### Patents:

The design of GPLED78 is protected by patents pending in US, Canada, China, Taiwan and Mexico

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:


RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

### Optical

#### BUG Rating:

B3 U3 G2

## Dimensions

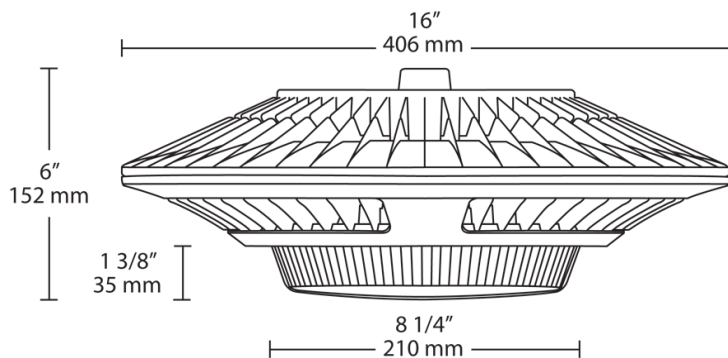

## Features

- Low-profile design Ideal for Parking Garages
- 78W Replaces 250W MH Luminaires
- 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Up to 25% Reduction in Fixture Count
- Lock screw provided for pendant mount

Ordering Matrix

Family	Wattage	Color Temp	Back Box	Finish	Driver
GPLED	78				
52 = 52W	Blank = 5000K Cool	Blank = No Backbox	Blank = Bronze	Blank = No Option	
78 = 78W	N = 4000K Neutral	BB = Back Box	W = White	/D10 = 0-10V Dimming	
26 = 26W	Y = 3000K Warm			/480 = 480V	
				/480/D10 = 480V w/0-10V Dimming	
				/BL = Bi-Level	