

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_

Date: \_\_\_\_\_

## Individual Spec Sheet

# TRADITIONAL RECESSED

### ORDERING INFORMATION

**Order code:** 64335  
**Model number:** RF4in/NC/IC\_NON-IC/E26/STD  
**UPC:** 069549643352  
**Case quantity:** 4

### PHYSICAL DATA

**Type:** New Construction - IC/Non-IC<sup>2</sup>  
**Housing material:** Industrial-strength galvanized steel  
**Can diameter in. (mm):** 4 (102)  
**Opening diameter in. (mm):** 4 1/4 (108)  
**Socket:** E26

### PERFORMANCE DATA

**Compatible lamp:** PAR20, PAR16 MR16  
**Volts (V):** 120  
**Thermal protection:** Yes  
**Junction box:** Yes  
**Wire to wire connectors:** Yes

### INSTALLATION

- Screw adjusting system
- Permits the installation in ceilings up to 1 1/4 in. in thickness
- Suitable for double drywall application
- Hanger bars included with built in spikes
- Wire to wire connectors

### CAUTIONS

- Turn power off before inspection, installation, or removal
- Risk of electric shock – do not use where directly exposed to water or weather
- Risk of fire. Blinking light of this thermally protected fixture may indicate overheating
- Minimum 90 °C supply conductor
- May be interconnected using the same circuit
- Use with STANDARD trims only



**1**  
yr  
**warranty**



**quick  
ship**

**6**

**damp  
location**

**9w**  
maximum  
per lamp

**50w**  
maximum  
per lamp





This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
Max. of 4 no. 12 AWG through branch circuit conductor suitable for 90°C permitted in box.  
For complete warranty information please visit [www.standardpro.com](http://www.standardpro.com)

**COMPATIBLE LAMPS AND TRIMS**

Compatible lamps	Max Wattage (W)	Compatible STANPRO trims
<b>Type: Non-IC</b>		
HALOGEN PAR20	35	62737, 62739, 62741
	50	62705, 62709, 62713, 62717, 62721, 62742, 62743, 62744, 62749, 62750, 62751, 62752, 62753
HALOGEN PAR16 MR16 (E26)	35	62730, 62731, 62732, 62733, 62734, 62735, 62736, 62738, 62740
	50	62704, 62706, 62708, 62712, 62716, 6271862720, 62722, 62723, 62724, 62725, 62754, 62755, 62756
<b>Type: IC</b>		
HALOGEN or LED PAR16 MR16 (E26)	9	62737, 62739, 62741, 62705, 62709, 62713, 62717, 62721, 62742, 62743, 62744, 62749, 62750, 62751, 62752, 62753
	7	62730, 62731, 62732, 62733, 62734, 62735, 62736, 62738, 62740, 62704, 62706, 62708, 62712, 62716, 62718, 62720, 62722, 62723, 62724, 62725, 62754, 62755, 62756

**DIMENSIONS**

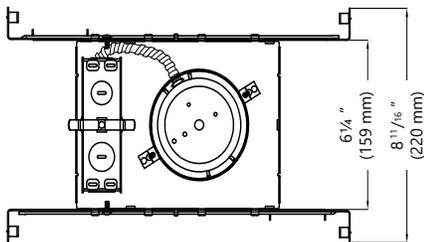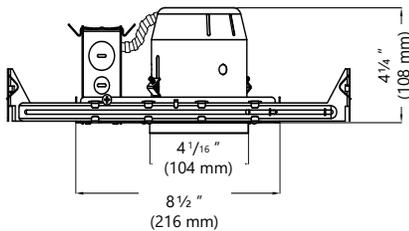

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.