



HEAVY DUTY SUPPORT GRIPS


Heavy Duty Support Grips are designed to withstand greater loads and increased stress. The mesh is also available in stainless steel or as single weave.

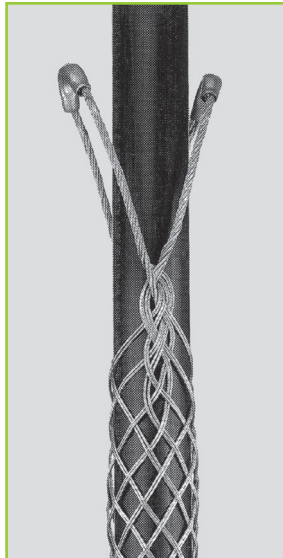

Cable Range	Part #	Description	Approx.* Breaking Strength	Length	
				Eye	Mesh
Single Eye – Closed Mesh – Double Weave					
.75- .99	2206-001	P075-SE	2700	10	26
1.00-1.24	2206-002	P100-SE	4720	10	29
1.25-1.49	2206-003	P125-SE	4720	10	31
1.50-1.99	2206-004	P150-SE	4720	10	35
Double Eye – Closed Mesh – Double Weave					
.75- .99	2206-006	P075-DE	2700	10	26
1.00-1.24	2206-007	P100-DE	4720	10	29
1.25-1.49	2206-008	P125-DE	4720	10	31
1.50-1.99	2206-009	P150-DE	4720	10	35
2.00-2.49	2206-010	P200-DE	10080	10	37
2.50-2.99	2206-011	P250-DE	10080	10	39
3.00-3.49	2206-012	P300-DE	10080	10	41
3.50-3.99	2206-013	P350-DE	13120	10	45
4.00-4.49	2206-014	P400-DE	13120	10	47



Single Eye

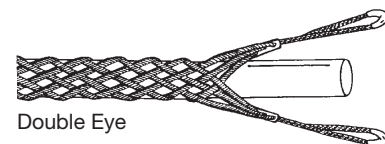

Double Eye

WIDE RANGE STRAIN RELIEF GRIPS

Strain Relief Grips are used on cable to prevent pull-out, damage resulting from flexing and to control arc of bend. Grips are made with a single weave, galvanized steel mesh and aluminum fittings. A gasket is used to provide a seal from dust, filings and other foreign material.



Cable Range	Part #	Description	Fitting Thread Size	Mesh Length
Insulated – NPT Thread				
.22- .32	7303-001	SR-022	1/2"	3-1/4"
.30- .43	7303-002	SR-030	1/2"	3-1/4"
.40- .54	7303-003	SR-040	1/2"	4-3/4"
.52- .73	7303-004	SR-052	3/4"	5-3/4"
.70- .97	7303-005	SR-070	1"	7"
.94-1.25	7303-006	SR-094	1-1/4"	9"
1.20-1.50	7303-014	SRP-120	1-1/2"	11-3/4"
1.50-1.70	7303-015	SRP-140	2"	13-1/4"
1.70-2.00	7303-016	SRP-162	2-1/2"	13-1/2"
2.00-2.45	7303-017	SRP-200	2-1/2"	13-3/4"

