


# CE SERIES

## CASED COPPER MULTI-POSITION COIL

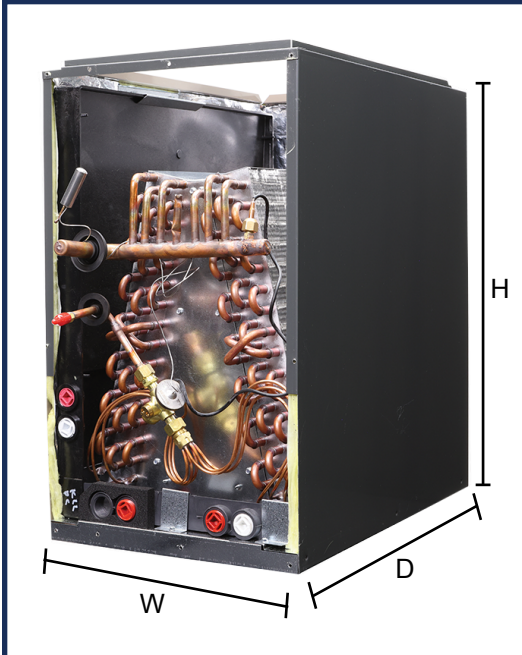

Unit shown with service panels removed. Representative image only. Some models may vary in appearance.

### STANDARD FEATURES

- Rifled copper tubing, enhanced aluminum fins.
- Standard Upflow without field modification. Downflow applications require field-installed downflow kit, sold separately.
- Immersion tested at 500 psi, followed by nitrogen pressurization and factory sealing to ensure optimal system integrity and long-term reliability.
- Schrader provided for pressure assurance testing.
- **Left/right-hand standard refrigerant/plumbing connections:**
  - **Liquid line:** 3/8" ODS      ○ **Condensate Drains:** 3/4" NPT
  - **Suction line:**
    - ▶ 3/4" ODS on 1-1/2-ton to 3-ton    ▶ 7/8" ODS on 3-1/2-ton to 5-ton
- Heavy duty plastic drain pans standard on all, powder coated galvanized steel horizontal drain pans optional.
- Fully insulated cabinets with faced insulation. Split access doors in front of cabinet for easy service access.
- ETL and AHRI listed for R22, R410A, R454B, and R32 refrigerants [A2L Refrigerants certified with Refrigerant Detection System (RDS)].
- A2L refrigerants require a Refrigerant Detection System (RDS) for compliance.
- AHRI certifiable with all brands of A/C and heat pump systems.

### WARRANTY

- Ten-year limited warranty with registration.

## UNIVERSAL A2L REFRIGERANT TECHNOLOGY FOR R32 & R454B SYSTEMS

IDEAL FOR USE WITH BOTH CASED AND UNCASSED COILS, PLUS ALL AIR HANDLERS!

Aspen coils and air handlers are engineered with Universal A2L Refrigerant Technology, allowing field configurability for either R32 or R454B refrigerants. Each unit ships with a factory-installed A2L metering device that can be easily swapped at installation, and includes the option for a factory- or field-installed universal Refrigerant Detection System (RDS) compatible with both refrigerants.

#### OTHER POPULAR CUSTOM OPTIONS:

- Refrigerant Detection System (RDS) kit factory-installed.
- Powder-painted metal pans.
- Factory or field-installed TXV available.
- Painted cabinets.

#### DOWNFLOW KIT OPTIONS:

##### METAL DRAIN PANS

- 16" DWNFLWM-16
- 18" DWNFLWM-18

##### PLASTIC DRAIN PANS

- DWNFLWP

CE-SS-C-004-A



In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Customer Service: info@aspenmfg.com    Warranty Team: warranty@aspenmfg.com    Phone: 281.441.6500    Toll Free: 800.423.9007    Fax: 281.441.6510



DIMENSIONAL DATA (In.)														
COIL MODEL	NOM. CAPACITY	CABINET DIMENSIONS									SHIPPING INFO.			
		STANDARD CABINET WIDTH							DEPTH	HEIGHT	WEIGHT (LBS)			MIN. ORDER QTY
		W"									# OF ROWS			
	BTU	14"	14-1/2"	17"	17-1/2"	21"	24"	24-1/2"	D"	H"	2	3	4	
CE24A*	24,000	14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	19	31	39	46	20
CE24B*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	19	36	45	54	20
CE24C*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	23	41	52	61	12
CE24D*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	23	46	58	69	12
CE30A*	30,000	14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	19	36	45	54	20
CE30B*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	23	41	52	51	12
CE30C*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	23	46	58	59	12
CE30D*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	27	52	65	77	12
CE30E*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	27	54	67	79	12
CE36A*	36,000	14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	23	41	52	61	12
CE36B*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	23	46	58	69	12
CE36C*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	27	52	65	77	12
CE36D*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	27	57	71	84	12
CE36E*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	23	41	52	61	12
CE36F*		14 <sup>(4)</sup>	14-1/2 <sup>(4)</sup>	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	-	-	21-1/2	30	67	84	100	10
CE42A*	42,000	-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	23	46	58	69	12
CE42B*		-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	27	52	65	77	12
CE42C*		-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	27	57	71	84	12
CE42D*		-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	30	62	78	92	10
CE42E*		-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	23	46	58	69	12
CE42F*		-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	30	62	78	92	10
CE48A*	48,000	-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	27	52	65	77	12
CE48B*		-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	27	57	71	84	12
CE48C*		-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	30	62	78	92	10
CE48D*		-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	30	67	84	100	10
CE48F*		-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	30	64	80	94	10
CE48G*		-	-	17 <sup>(4)</sup>	17-1/2 <sup>(4)</sup>	21	24	24-1/2	21-1/2	30	69	86	102	10
CE60A*	60,000	-	-	-	-	21	24	24-1/2	21-1/2	30	62	78	92	10
CE60B*		-	-	-	-	21	24	24-1/2	21-1/2	30	67	84	100	10
CE60C*		-	-	-	-	21 <sup>(2)</sup>	24 <sup>(2)</sup>	24-1/2 <sup>(2)</sup>	23 <sup>(2)</sup>	30	70	88	104	10
CE60D*		-	-	-	-	21 <sup>(2)</sup>	24 <sup>(2)</sup>	24-1/2 <sup>(2)</sup>	23 <sup>(2)</sup>	35	76	95	112	10
CE60E*		-	-	-	-	-	24-1/2 <sup>(3)</sup>	26-1/2 <sup>(3)</sup>	21-1/2 <sup>(3)</sup>	30	-	-	-	10
CE60F*		-	-	-	-	21	24	24-1/2	21-1/2	30	64	80	94	10
CE60G*		-	-	-	-	-	24-1/2 <sup>(3)</sup>	26-1/2 <sup>(3)</sup>	21-1/2 <sup>(3)</sup>	30	-	-	-	10

Notes: (1) Do not use plastic drain pans on oil furnaces or other applications where outlet temperature may exceed 290°F +/- 5°F. Metal drain pans are recommended for this type of application. (2) Metal drain pan. (3) Metal drain pan. Slab rotated 90°. Refrigerant and plumbing connections still exit in front. (4) Metal drain pan applicable for 4 row.

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMPERATURE LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

CE-SS-C-004-A

### HELPFUL LINKS



**VIEW PRODUCT ONLINE**  
For full warranty terms and conditions, please refer to the Warranty Information section on Aspen's official website.



**ASK YOUR LOCAL SALES REP OR SCAN TO LEARN MORE**  
Aspen's A2L Refrigerant Technology for R32 and R454B Systems.

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Customer Service: info@aspenmfg.com Warranty Team: warranty@aspenmfg.com Phone: 281.441.6500 Toll Free: 800.423.9007 Fax: 281.441.6510