


#52 Adjustable Clevis Hanger - Epoxy Copper-Gard

Finishes Copper Gard Epoxy Coating c/w Zinc hardware

Materials Carbon Steel

Approvals Complies with MSS SP-58 and SP-69 (Type 1).

Recommended Recommended for the suspension of copper tubing, stationary pipe lines allowing for vertical adjustment.

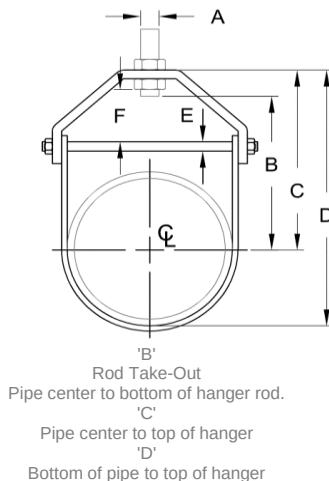

COPPER TUBE SIZE	SPECIFICATION DATA						REC. MAX. LOAD (LBS.)	APP'X WT. PER 100 (LBS)	PC'S PER PKG.
	A	B	C	D	E	F			
1/2	3/8	1 1/4	1 15/16	2 1/4	1/4	21/32	150	13	100
3/4	3/8	1 1/8	1 3/4	2 3/16	1/4	9/16	150	13	100
1	3/8	1 5/32	1 25/32	2 5/16	1/4	1/2	250	14	100
1 1/4	3/8	1 1/4	2 1/16	2 3/4	1/4	13/16	250	17	100
1 1/2	3/8	1 21/32	2 1/2	3 5/16	1/4	15/16	250	20	100
2	3/8	1 15/16	2 7/8	3 15/16	1/4	1 1/32	250	38	50
2 1/2	1/2	2 3/8	3 9/16	4 7/8	1/4	1 1/4	350	66	50
3	1/2	2 17/32	3 5/8	5 3/16	1/4	1 1/16	350	75	50
4	1/2	3 3/8	4 9/16	6 5/8	5/16	1 1/4	400	99	25
5	5/8	3 15/16	5 5/16	7 7/8	3/8	1 3/8	800	110	25
6	5/8	4 3/4	6 3/16	9 1/4	3/8	1 1/2	1000	125	25

QWI 4.3.1 Issue Date Jul/21 Rev.8