Engineering Specification

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative
Tog	

HY-600


Non-Freeze Post Hydrant

Specification:

Watts HY-600 non-freeze key operated post hydrant with decorative epoxy coated cast iron housing, all bronze head, seat casting and internal working parts, galvanized casing, and loose key.

Suf	Depth of Bury fix Description	
-2	2'(610) Depth	
-3	3'(914) Depth	
-4	4'(1219) Depth	
-5	5'(1524) Depth	
-6	6'(1829) Depth	
-8	8'(2438) Depth	

Suffix	Inlet/Outlet Sizing Description	
-3/4	3/4"(19) Connection Size	
-1"	1"(25) Connection Size	
-1-1/4"	1-1/4"(32) Connection Size	
-1-1/2"	1-1/2"(38) Connection Size	
-2"	2"(51) Connection Size	

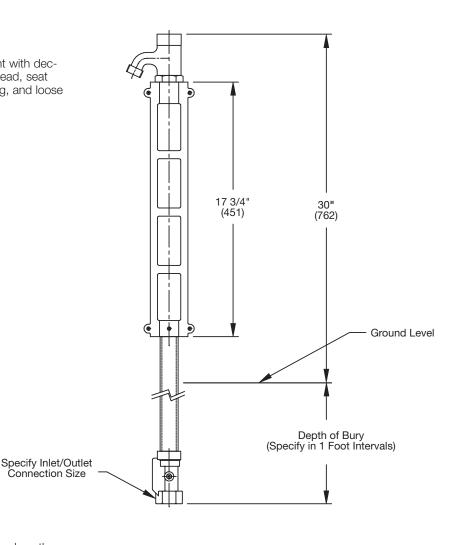

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com **Canada:** T: (888) 208-8927 • F: (905) 481-2316 • Watts.ca **Latin America:** T: (52) 55-4122-0138 • Watts.com

ES-WD-HY-600 2143 © 2021 Watts